

The logo for KAMAX, featuring a stylized white 'K' symbol above the word 'KAMAX' in white capital letters, all set against a red triangular background.


KAMAX



KES

SEEK AND ACCOMPANY

125CC

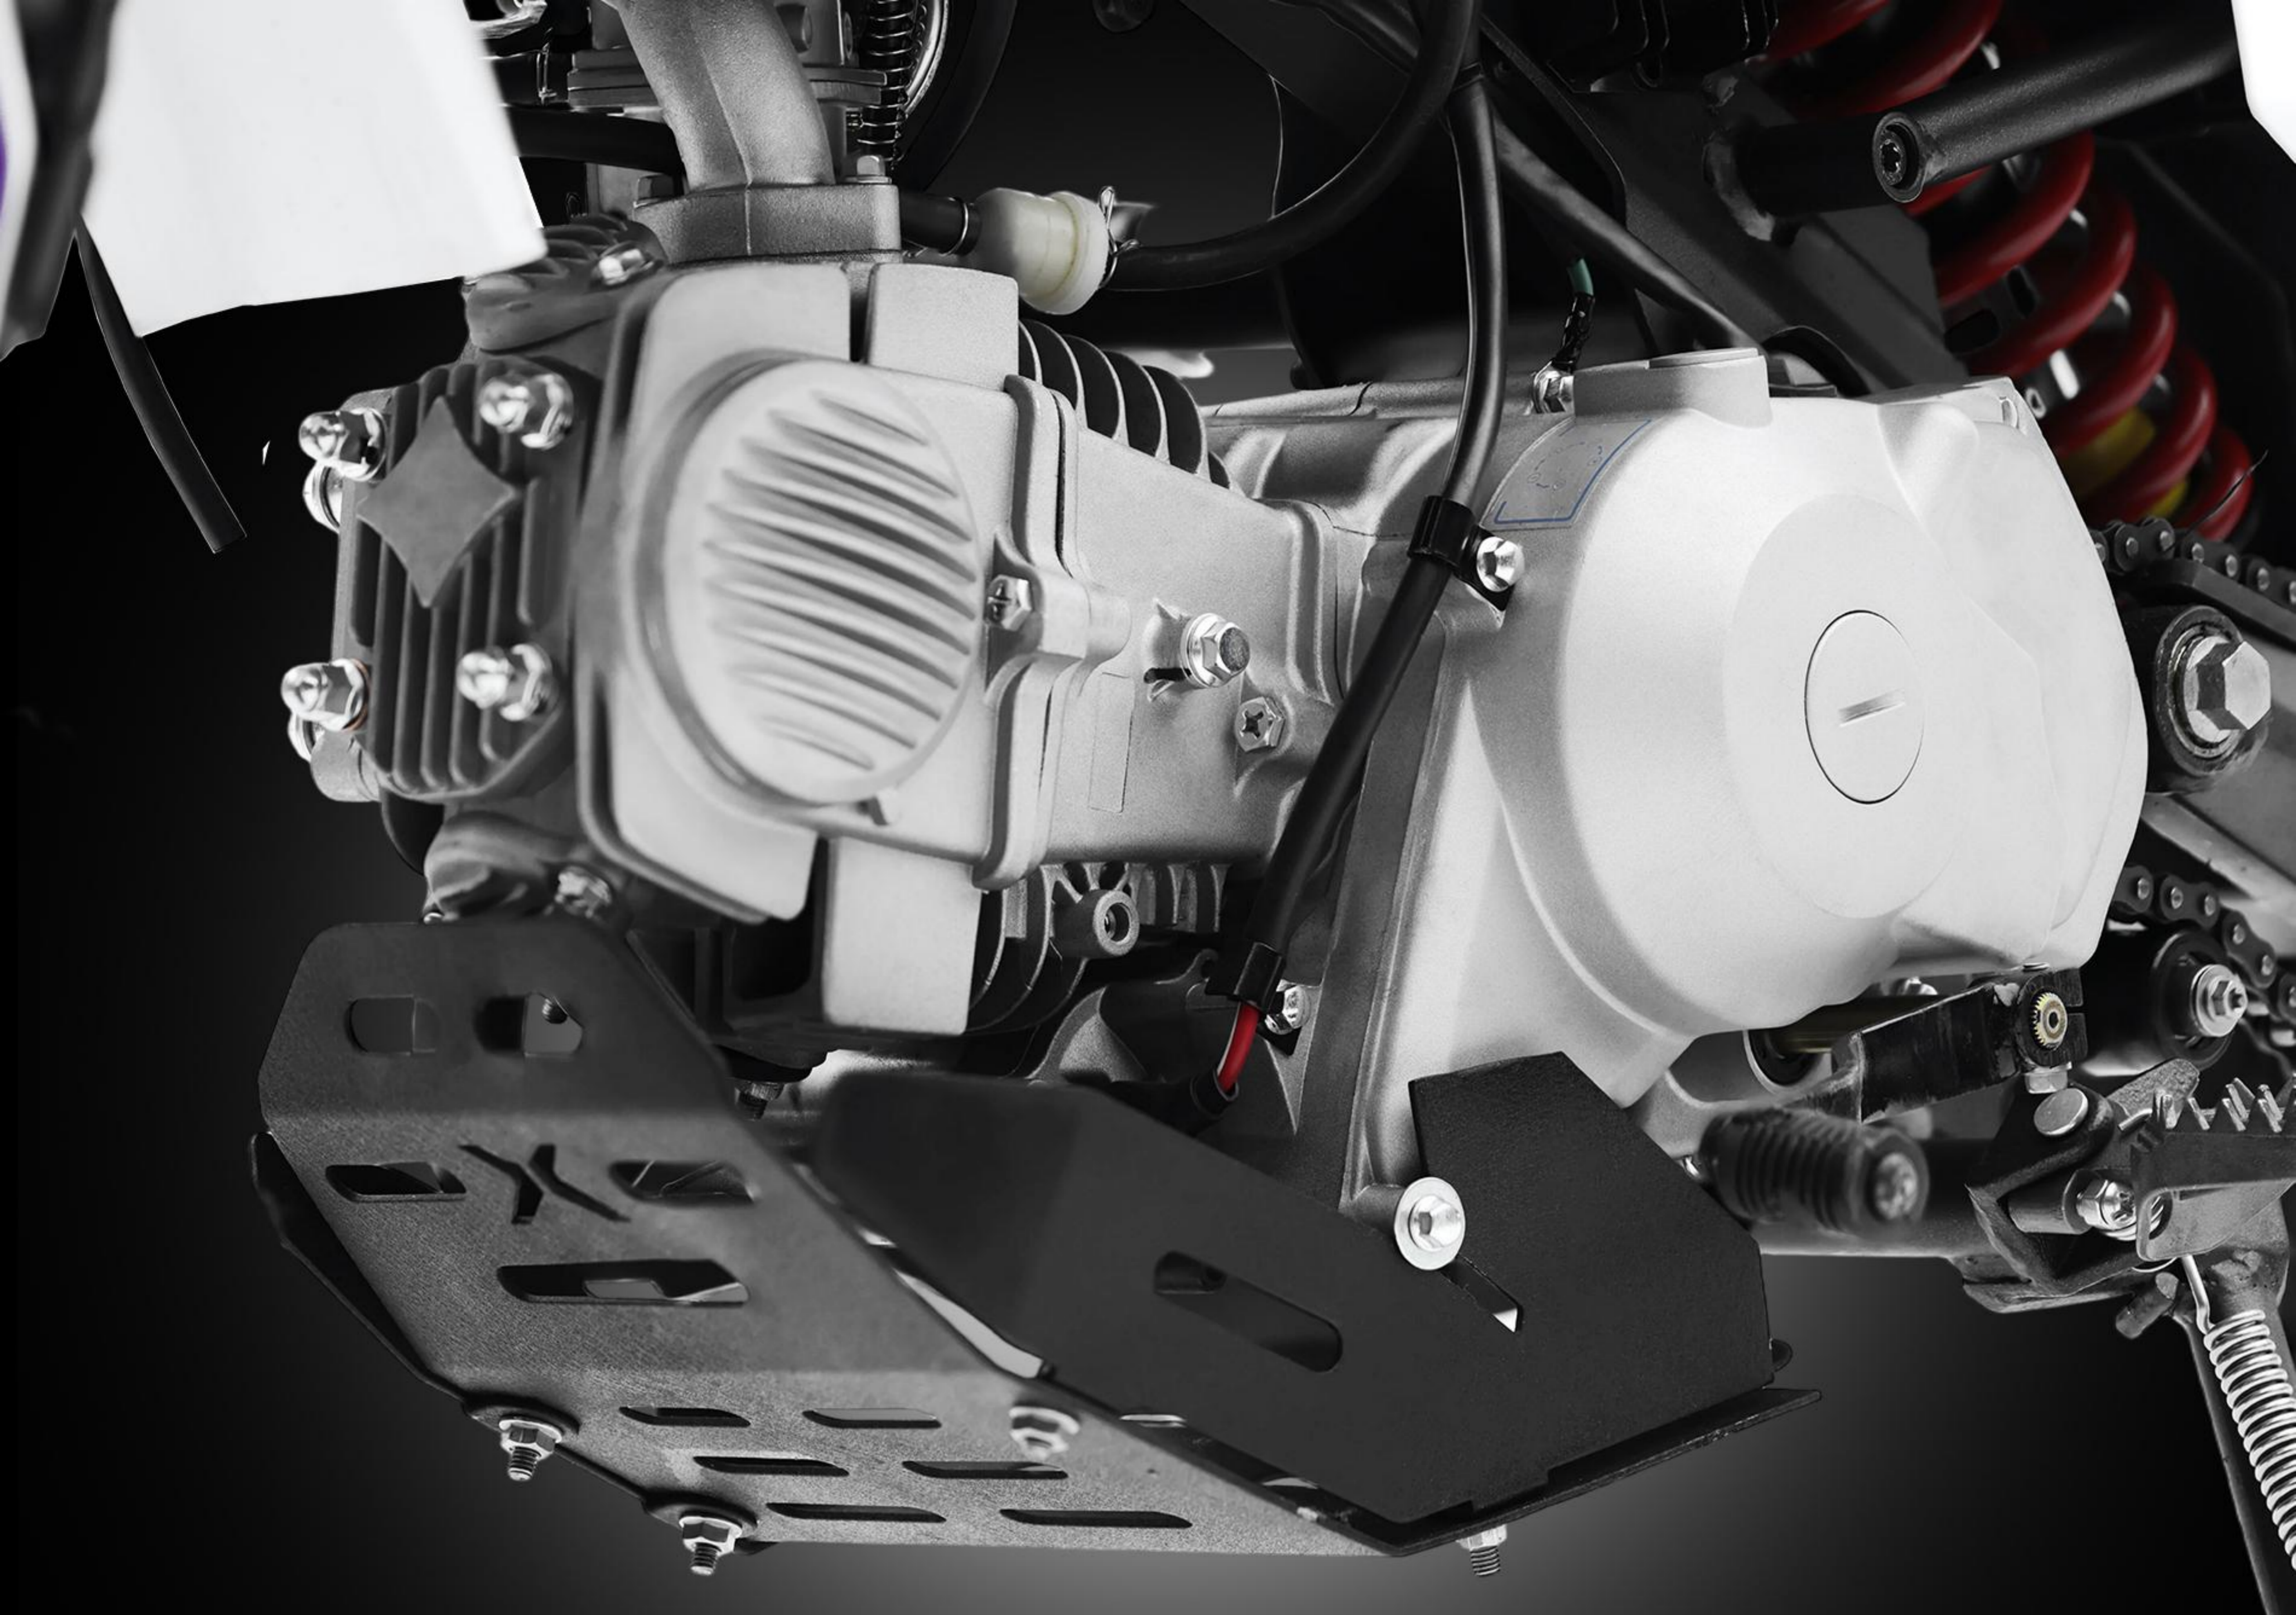

125CC

MODERATE DISPLACEMENT

Controllable power—meets progression needs without overwhelming, suitable for teens and adults

14/12-INCH SMALLER WHEEL DIAMETER

Smaller wheels, seat height friendly,
easy to plant both feet



SINGLE REAR SHOCK DIRECT-LINK DESIGN

Simple structure, soft rebound,
smooths out bumps gently



**SMALL BIKE
BIG COURAGE**

1



Anti-Slip Seat

Stay planted in turns, no sliding back under acceleration

428-43T Rear Sprocket

Moderate gearing, gentle takeoff, prevents loss of control from sudden throttle

2



3




Aluminum Forged Triple Clamp + Tapered Handlebar

Lightweight handling, easy steering


Stainless Steel Serrated Foot Pegs

Strong foot grip, feet stay secure on rough terrain

4

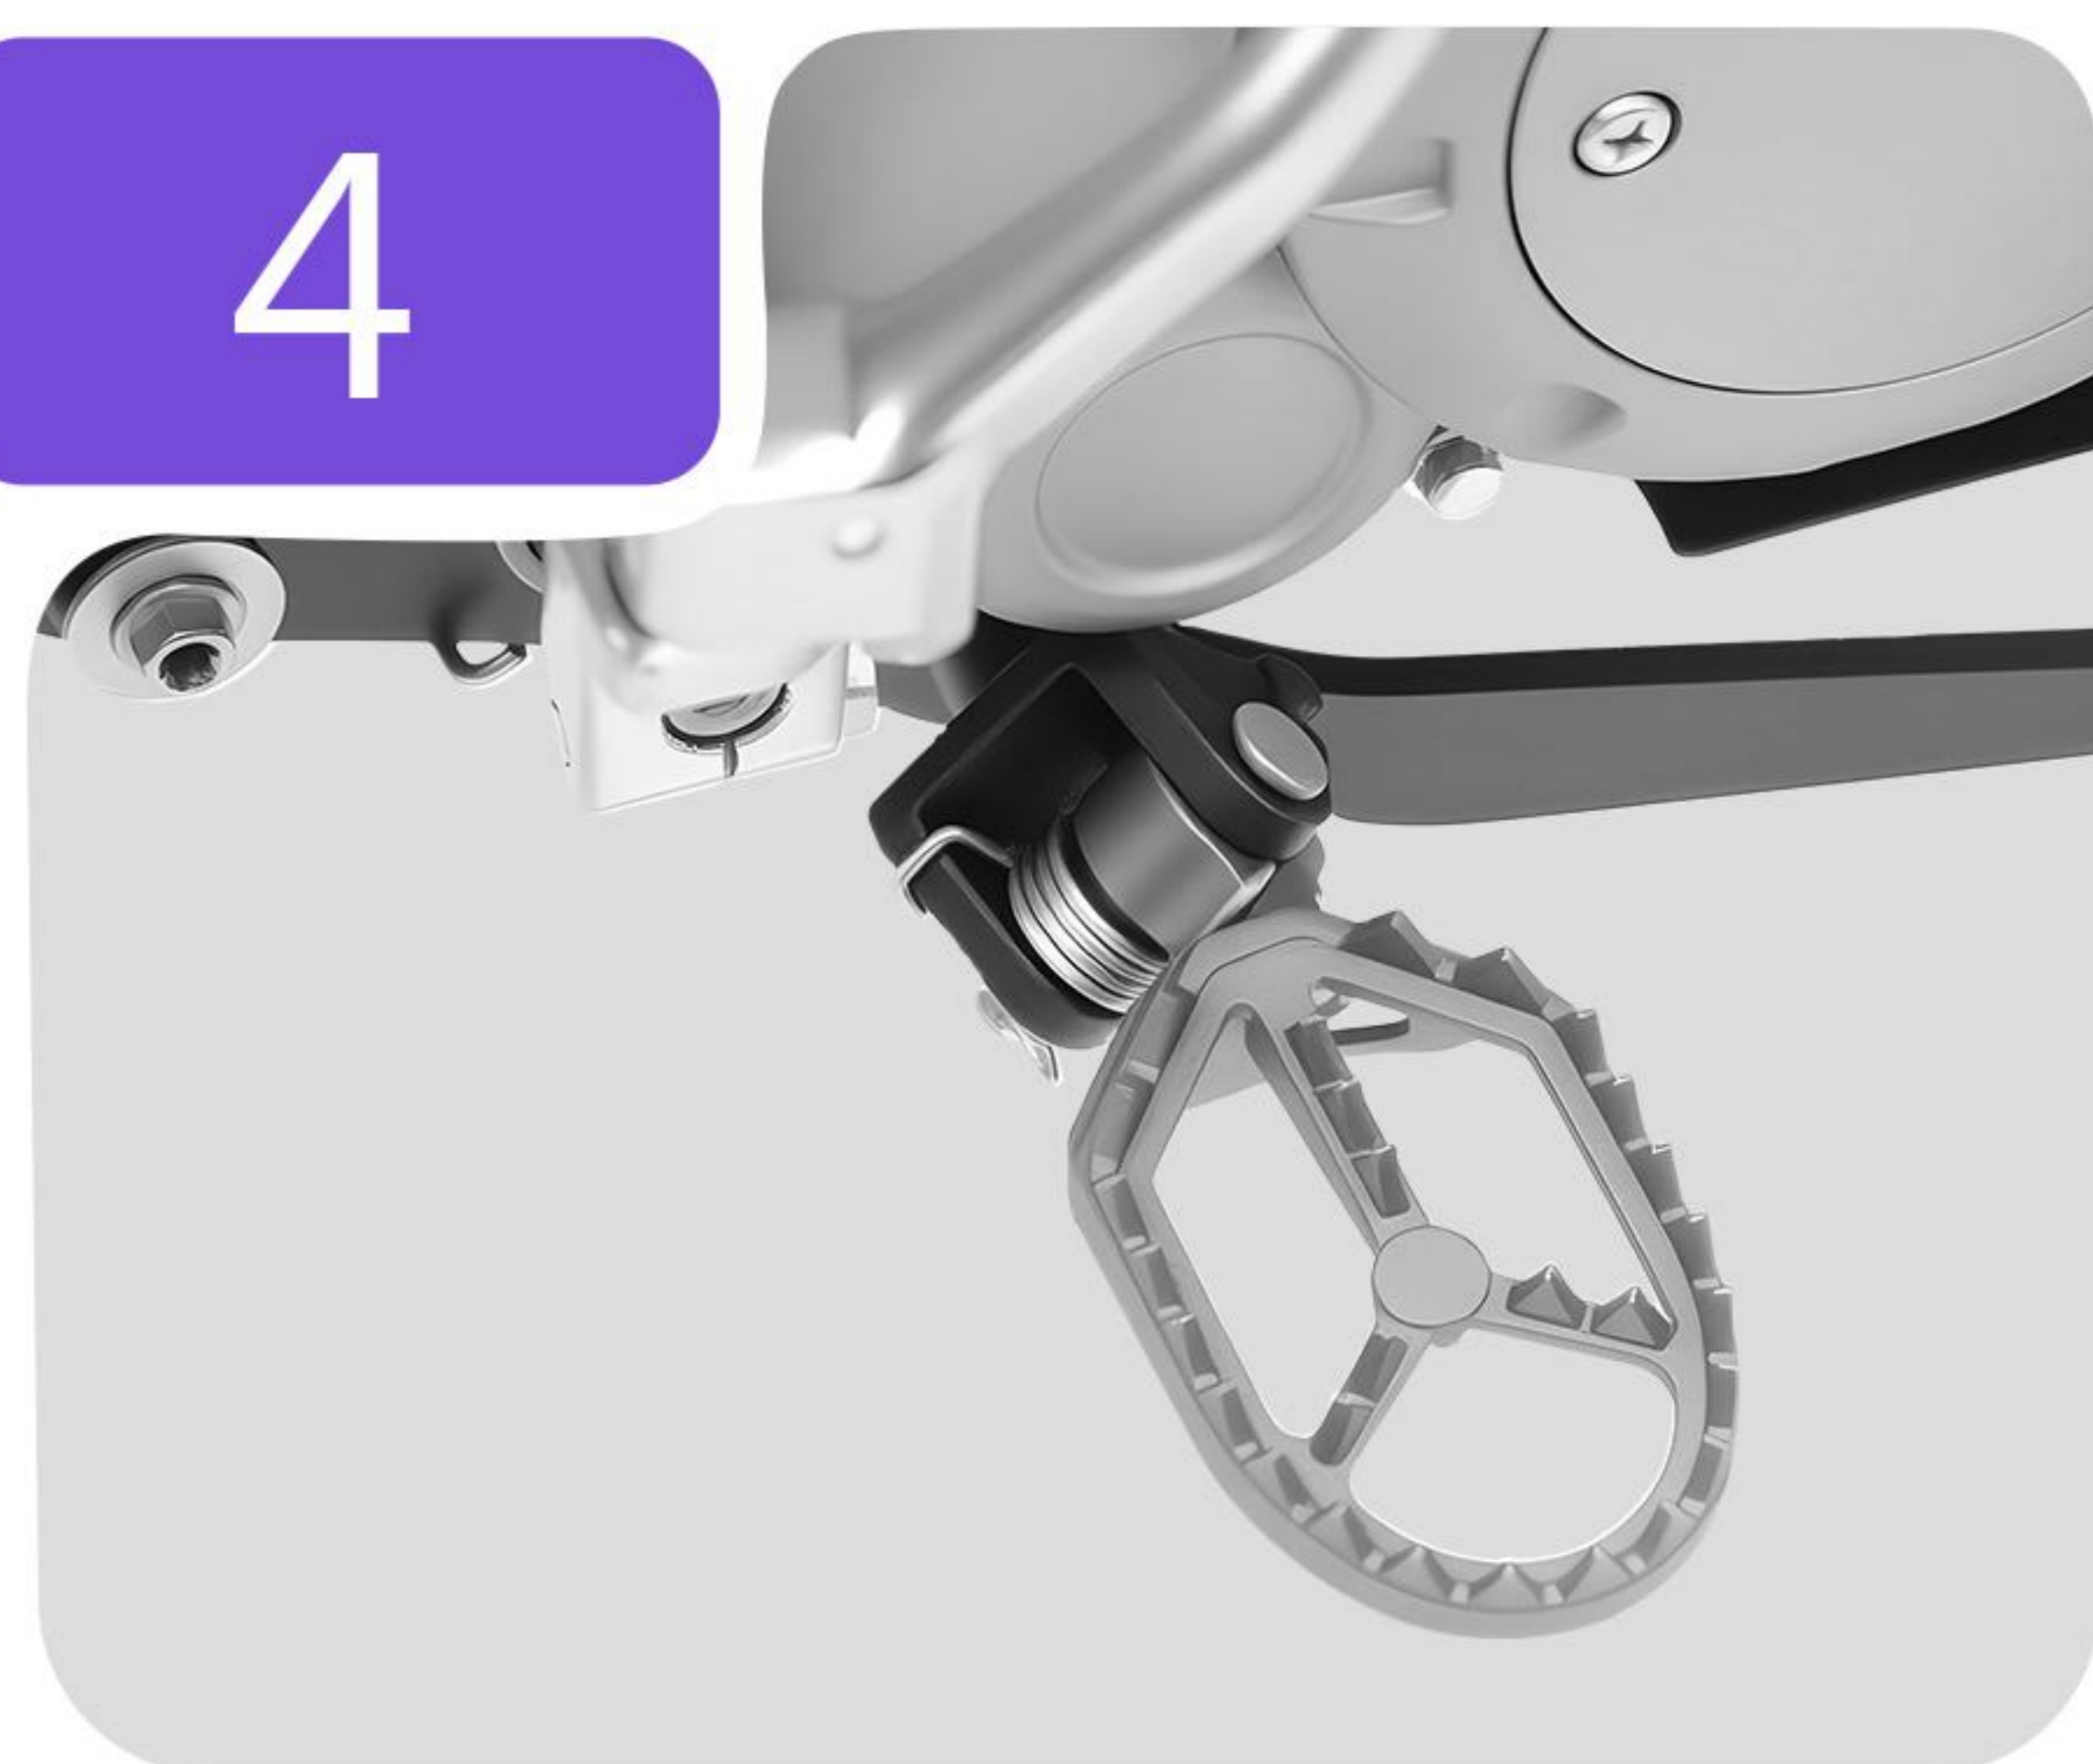

5

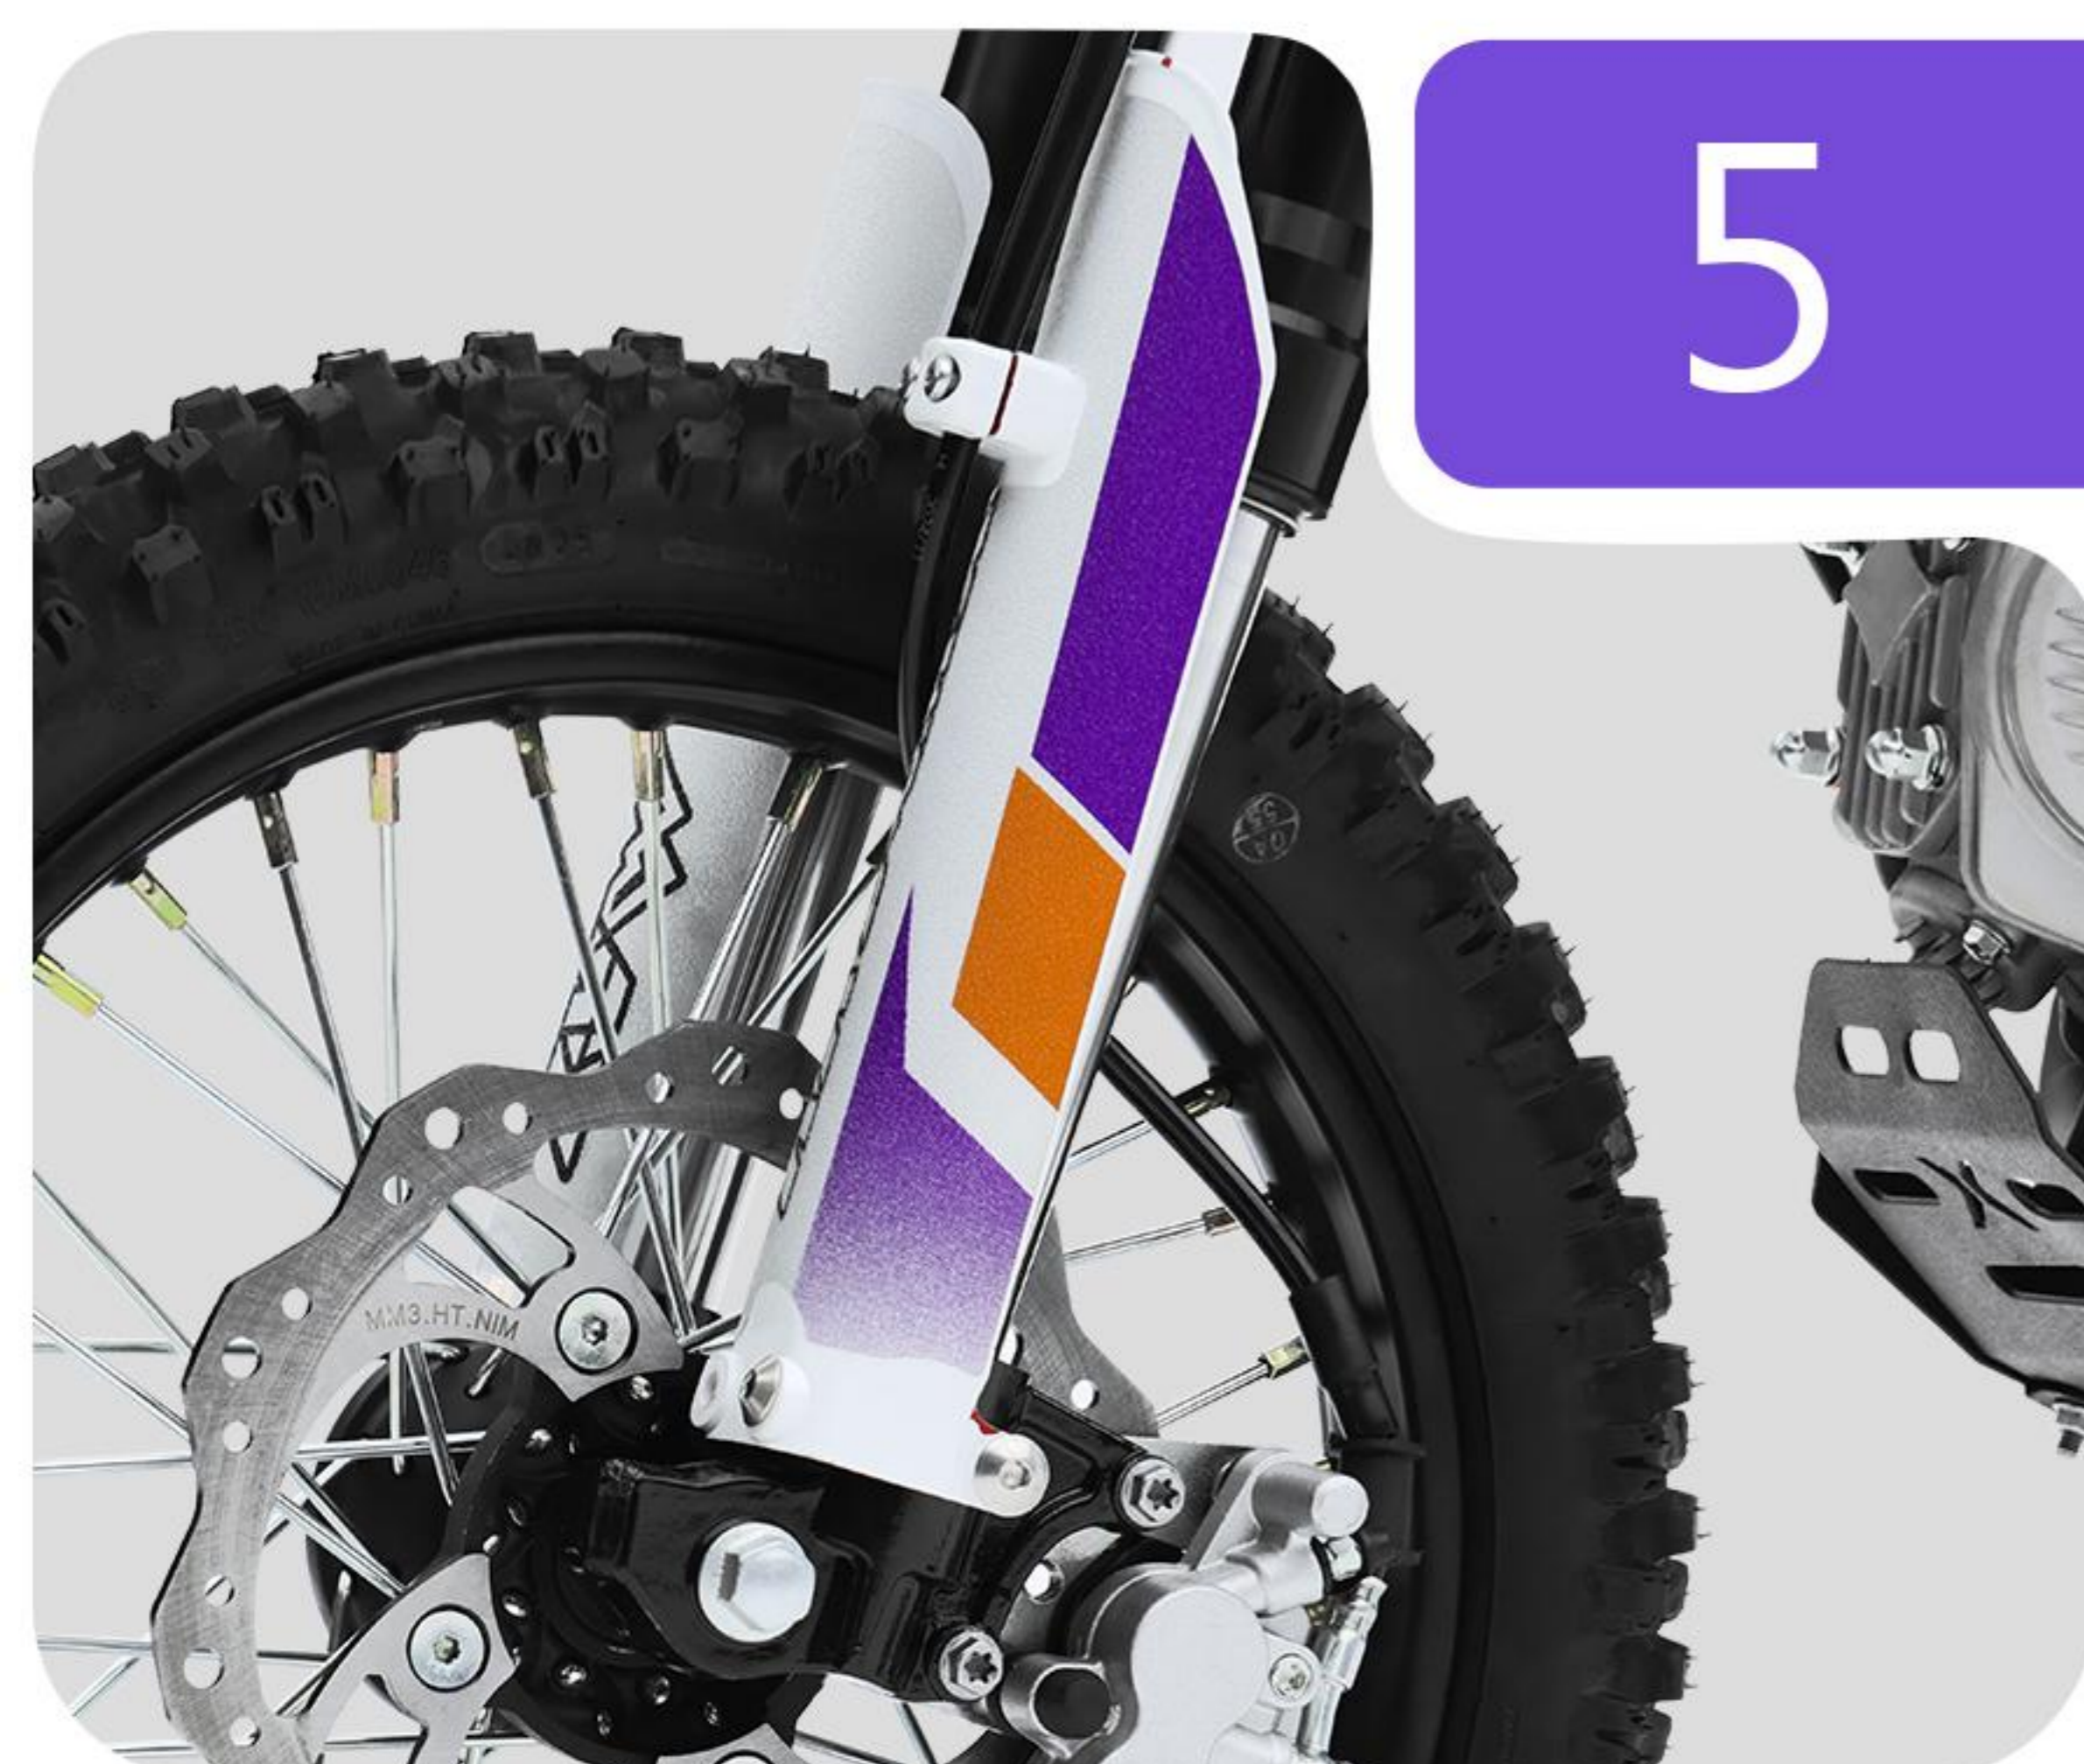

PP Shock Covers + Number Plate

Flexible impact-resistant plastic, won't shatter or injure in collisions



SMALL BIKE **BIG COURAGE**

Childhood needs some adventure,
fun is unlimited.



**RIDE YOUR MINI BIKE,
RACE TOWARD NATURE!**

ENGINE

Engine Name:	125CC
Engine Model:	1P53FMI
Engine Type:	Single Cylinder, 4 Stroke, Air Cool, Horizontal
Displacement:	124.6cc
Max.Power:	6.3/8000 kw/rpm
Max.Torque:	9.3/5000 N.m/rpm
Compression Ratio:	9.56:1
Bore:	52.4mm
Stroke:	57.8mm
Ignition Method:	C.D.I
Start Method:	Electric/Kick Start
Clutch Type:	Manual Clutch
Cearshift Method:	Constant Mesh 2-Stage 4-Speed
Fuel Delivery:	Carburetor
Lubrication Method:	Splash & Pressure Lubrication

VEHICLE PARAMETERS

Length × Width × Height:	1620×750×960mm
Seat Height:	710mm
Wheelbase:	1100mm
Min. Ground Clearance:	230mm
Net Weight:	102kg
Max. Speed (km/h):	80km/h
Fuel Tank Capacity:	6L
Max Load:	80kg
Tyres(Front/Rear):	60/100-14, 80/100-12
Fuel Type:	Gasoline
Battery:	12V 3A Lithium Battery